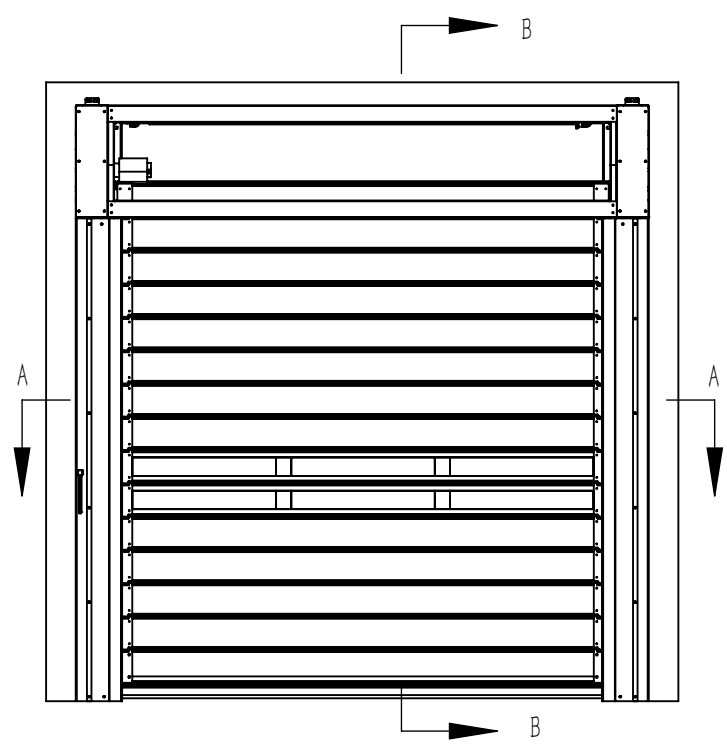

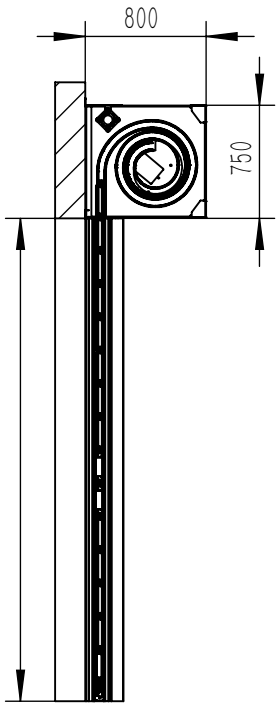

B–B

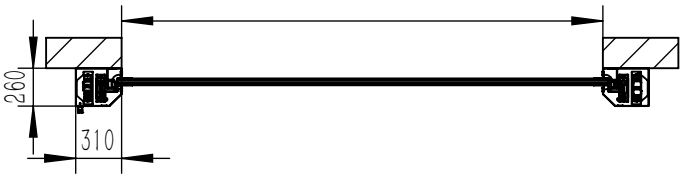

A–A

FINISHED OPENING SIZE: (W) (H)

Insulated Foam Panel Thickness

40mm ☐ 60mm ☐ 80mm ☐

Vision Window Height

(standard no window)

220mm ☐ 440mm ☐ 660mm ☐

UL LISTED OPERATOR INPUT POWER

220V–240V SINGLE PHASE

CONTROLS:

- ☐ STEP CONTROL (PULL TO OPEN, PULL TO CLOSE)
- ☐ TIMER TO CLOSE (PULL TO OPEN, TIME DELAY TO COLSE)
- ☐ 3–BUTTON CONTROL (OPEN, COLSE, STOP)
- ☐ RADOR OPEN AND TIMER CLOSE
- ☐ FLOOR LOOP OPEN AND TIMER CLOSE
- ☐ REMOTE CONTROL

SAFETY DEVICES:

BOTTOM SAFETY EDGE AND

SAFETY BEAM ARE STANDARD

- ☐ LIGHT CURTAIN
- ☐ EXTRA SAETY BEAM

MOUNTING FASTENERS:

- CONCRETE ANCHOR ☐
- METAL JAMBS ☐

OPTIONS:

- HEADER HOOD ☐
- STAINLESS STEEL TRACK COVER AND HEADER HOOD ☐

OTHER REQUIRED OPTIONS:

QUANTITY:

M/F: QUOTE: ☐ ORDER: ☐ #:

CUSTOMER:

JOB:

DATE:

SIGNATURE:

SHIP TO:

TDK DOORS

TDK HSR High Speed Spiral Roll Up Door Shop Drawing