

TDK FIBERGLASS DOORS

TDK INTERIOR ABS DOORS




**20 YEARS WARRANTY
AGAINST CORROSION >>>**

We stand behind our products

Warranty: TDK fiberglass doors have 20 years warranty against corrosion.

We design new specialty doors

Innovation: TDK engineering team continuously designs new specialty doors to better serve our customers' needs.

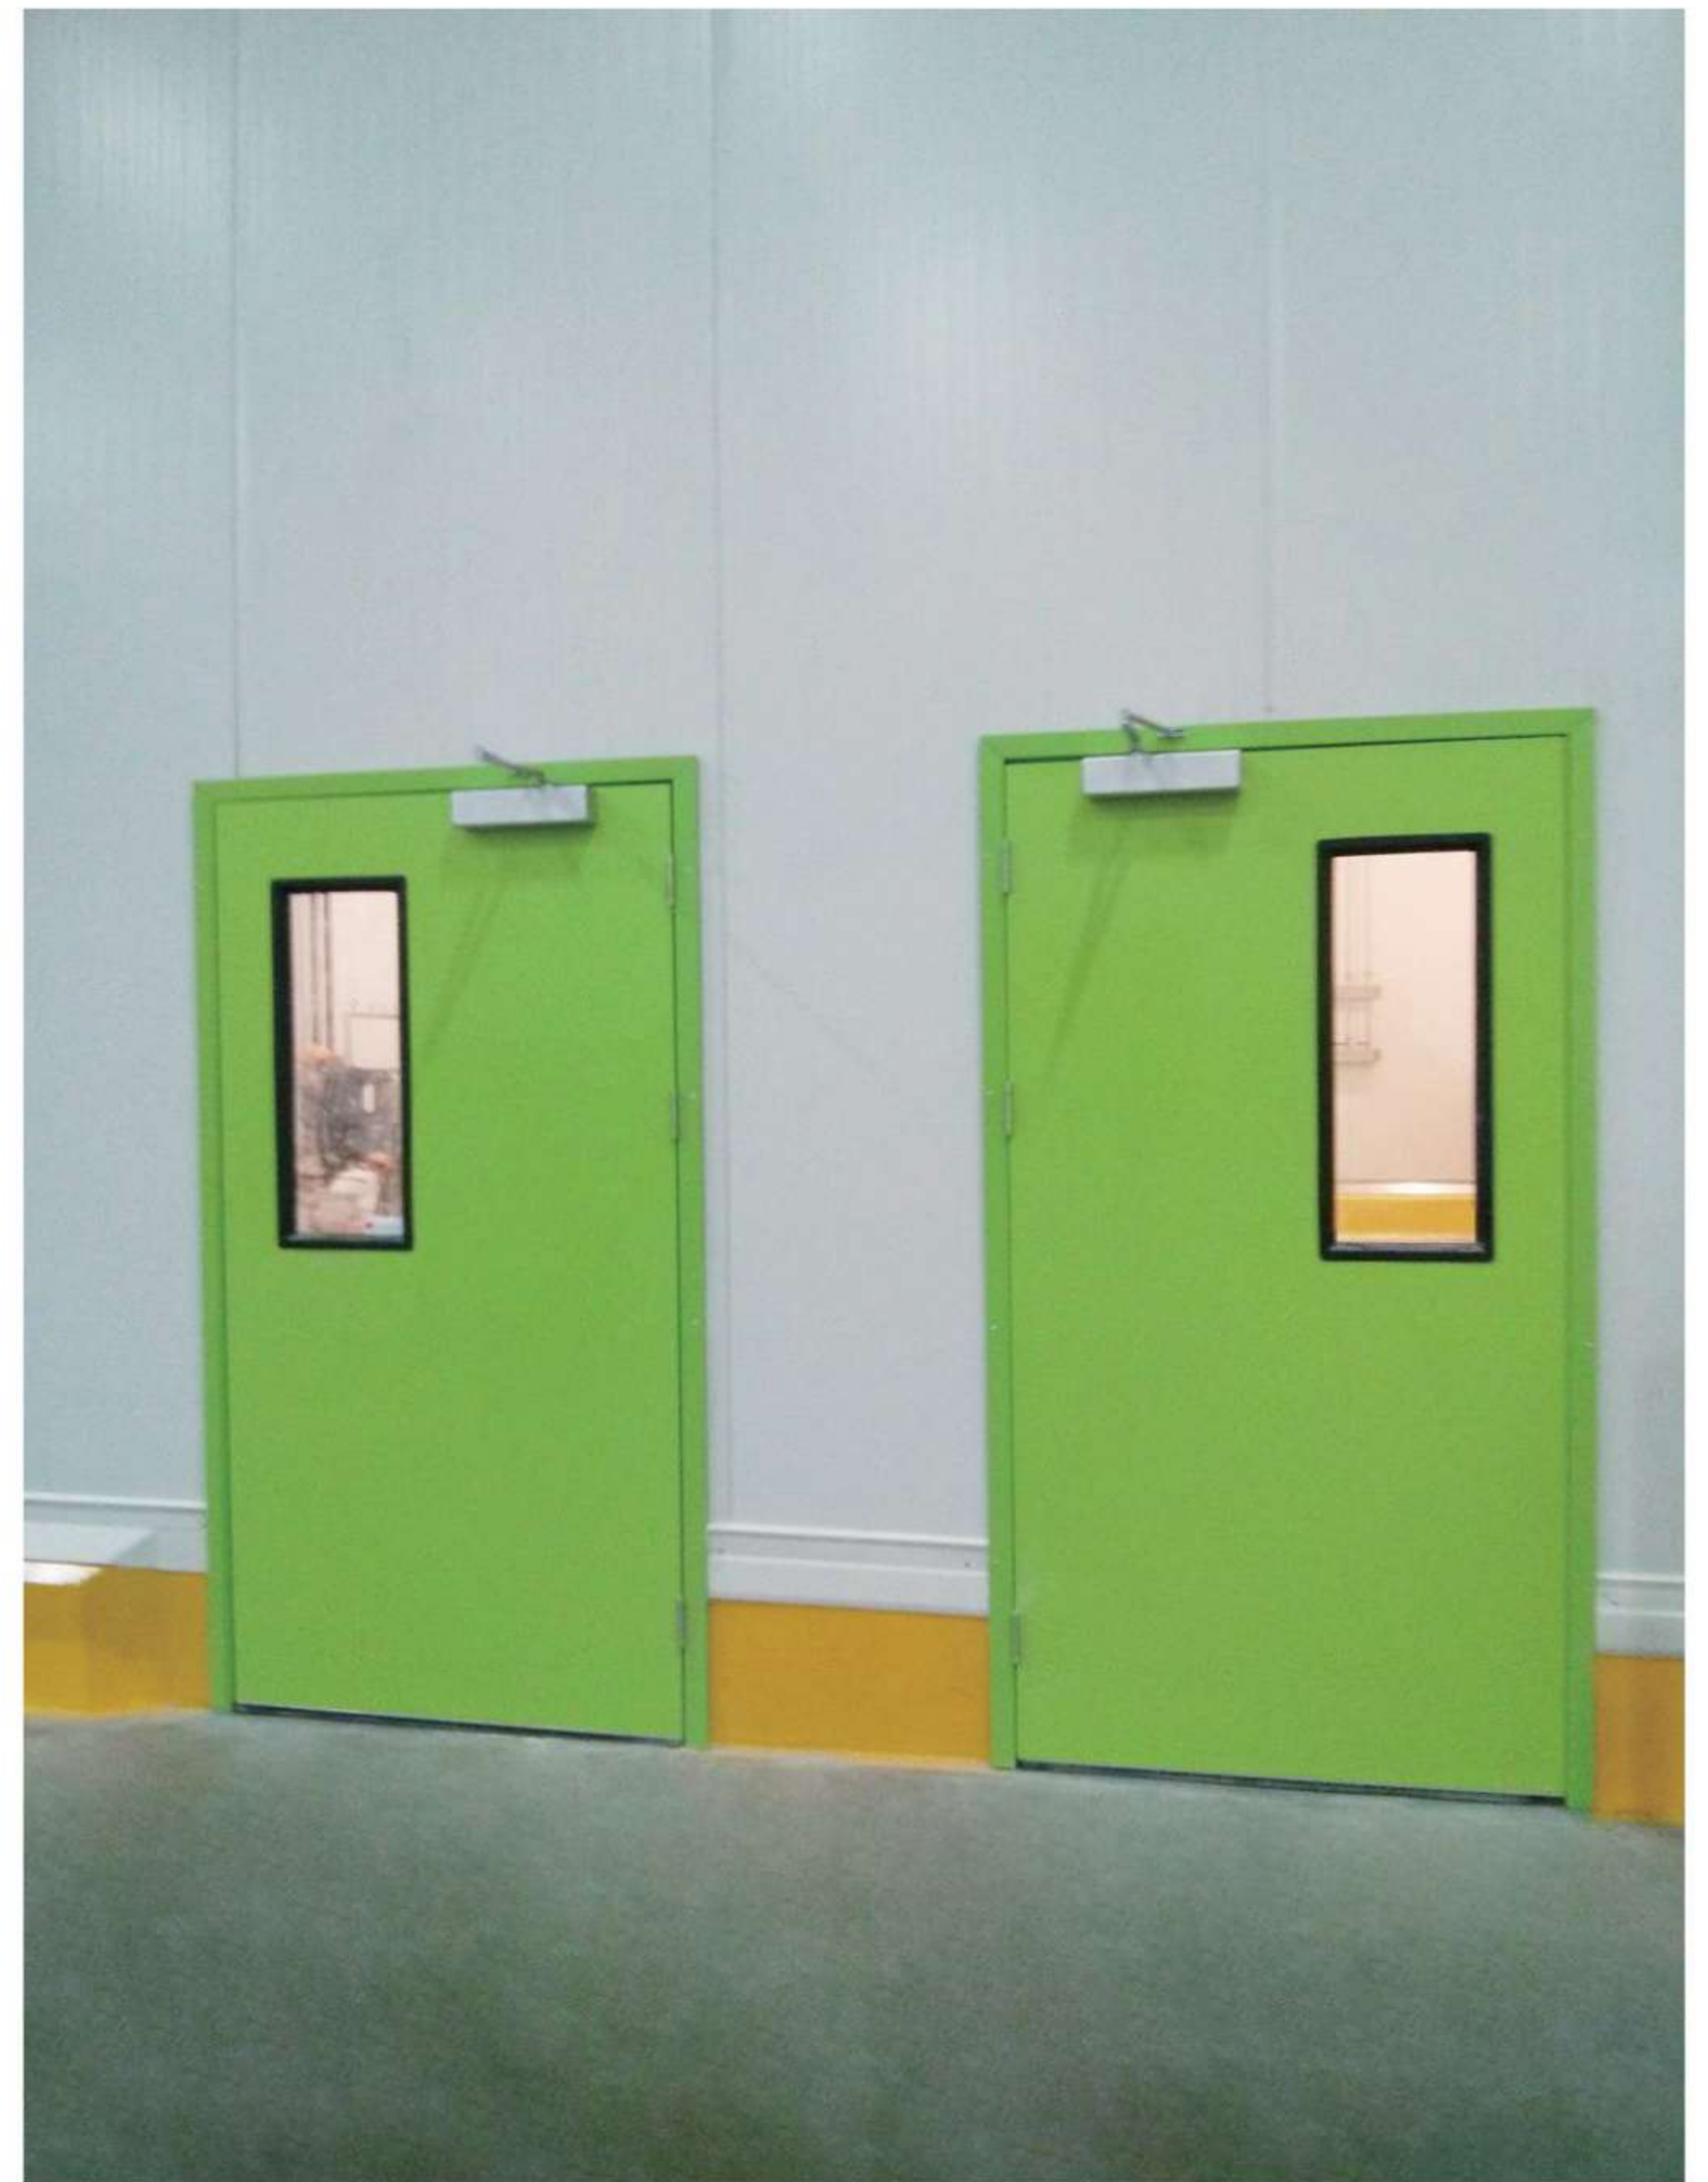

Corrosion is all around us—so prevalent that part of the United States is even known as the "Rust Belt." A significant portion of annual maintenance budgets is spent scraping, painting, and replacing assets damaged by corrosion. But when it comes to harsh environments, TDK fiberglass doors and TDK seamless ABS interior doors provide unmatched durability and protection.



TDK corrosion-resistant door is a high-quality door designed to withstand harsh environments. Our door is constructed with a PVC/Fiberglass extruded reinforced frame around the perimeter of the door panel, which provides additional strength and durability. The door panel is completely seamless, with no visible seams or gaps, and the door finish can be either ABS or fiberglass material.

Our door panel is available in two thicknesses: 1-3/4" and 4". 1-3/4" door can be made into either swing or sliding service door, insulated 4" swing door is specifically designed for use in cold storage environments.

TDK corrosion resistant doors are ideal for use in industrial settings where exposure to corrosive materials is common, such as seafood processing plants, pharmaceutical factories and other environments that require high levels of environmental protection.

The TDK logo, consisting of the letters T, D, and K in a stylized, bold, black font. The letters are interconnected, with the 'D' having a unique shape that fits between the 'T' and 'K'.



PRODUCT SELECTION

CHART

01	FRP 500 Features: Fiberglass sheet chemical welding with reinforcement tube	Economy choice and fast devlivery
02	ABS 500 Features: Interior and a lot moisture	Seamless ABS door panel, lower cost
03	SD 500A / F Features: Exterior and interior, need sliding open/close crosion environment	Meat processing factory and sea food factory

FRP 500


Structural extrusion components are permanently chemical welding to the face sheets and core material.




FRP 500: Fiberglass finish.

With reinforcement framework
Suitable for both interior and exterior application.

Standard Color: White.

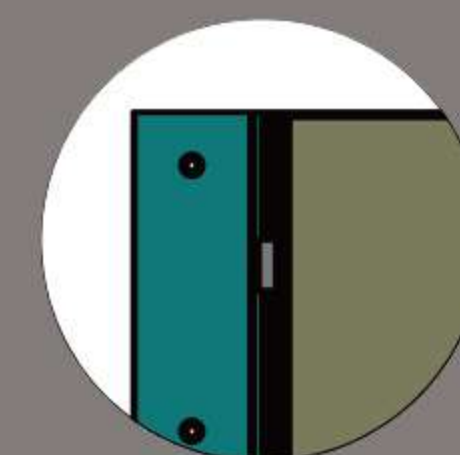

Continuous hinge

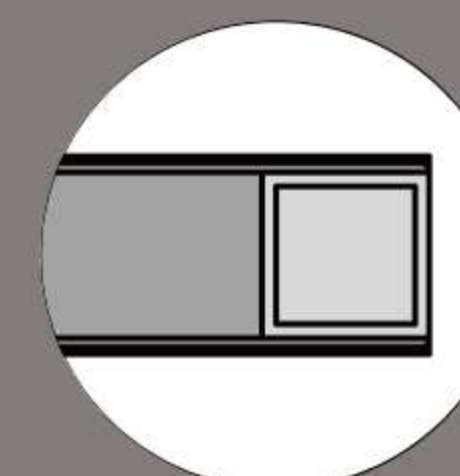

Plastic honey comb core / Foam core



Royal Blue



Metallic Gray



Black



Cloud Gray



Beige



Red

Door Panel

- Different Fiberglass Finish is Available
- Economy Panel Choice and Fast Delivery



Options

- Window Sizes
- Push/Pull
- Impact/Kick Plate
- Prep For Lock and Hinge



4" Single Rabbet

Applications

- Retail
- Restaurant
- Supermarket
- Institutional
- Industrial
- Warehouse
- Chemical Plant
- Food Processing
- Pharmaceutical

Environments

- Wash Down
- Corrosion Resistance


ABS 500

This door is for food processing where need washdown every day.




ABS 500: impact resistant
ABS finish.

Interior door only.

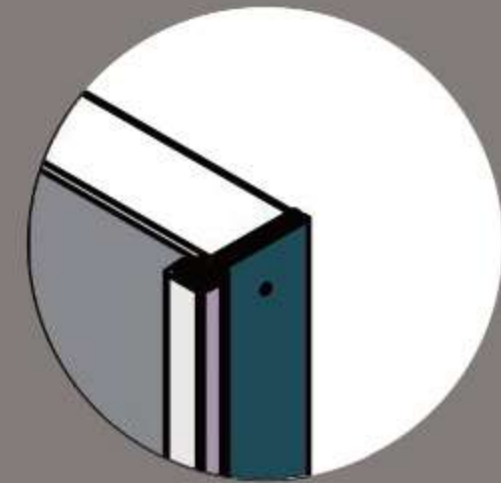

Continuous hinge or
prep for customer's
hinge and lock

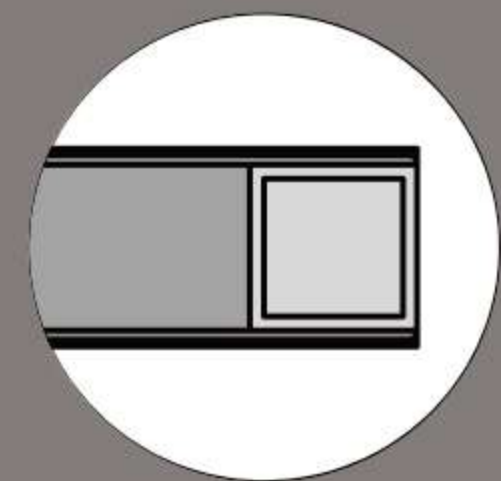

Plastic honey
comb core



Royal Blue



Metallic Gray



Black



Cloud Gray



Beige



Red

Door Panel

- 1-3/4" Door Panel
- Polyethylene Foam Core Chemically Bonded with ABS Finish



Options

- Window Sizes
- Push/Pull
- Impact/Kick Plate
- Prep For Lock and Hinge



Aluminum Pultrusion Door Frame

Applications


- Retail
- Restaurant
- Supermarket
- Institutional
- Industrial
- Warehouse
- Chemical Plant
- Food Processing
- Pharmaceutical

Environments

- Interior
- Wash Down
- Corrosion Resistance

SD 500A/F

In a washdown application SD 500A/F is perfect for fast traffic.

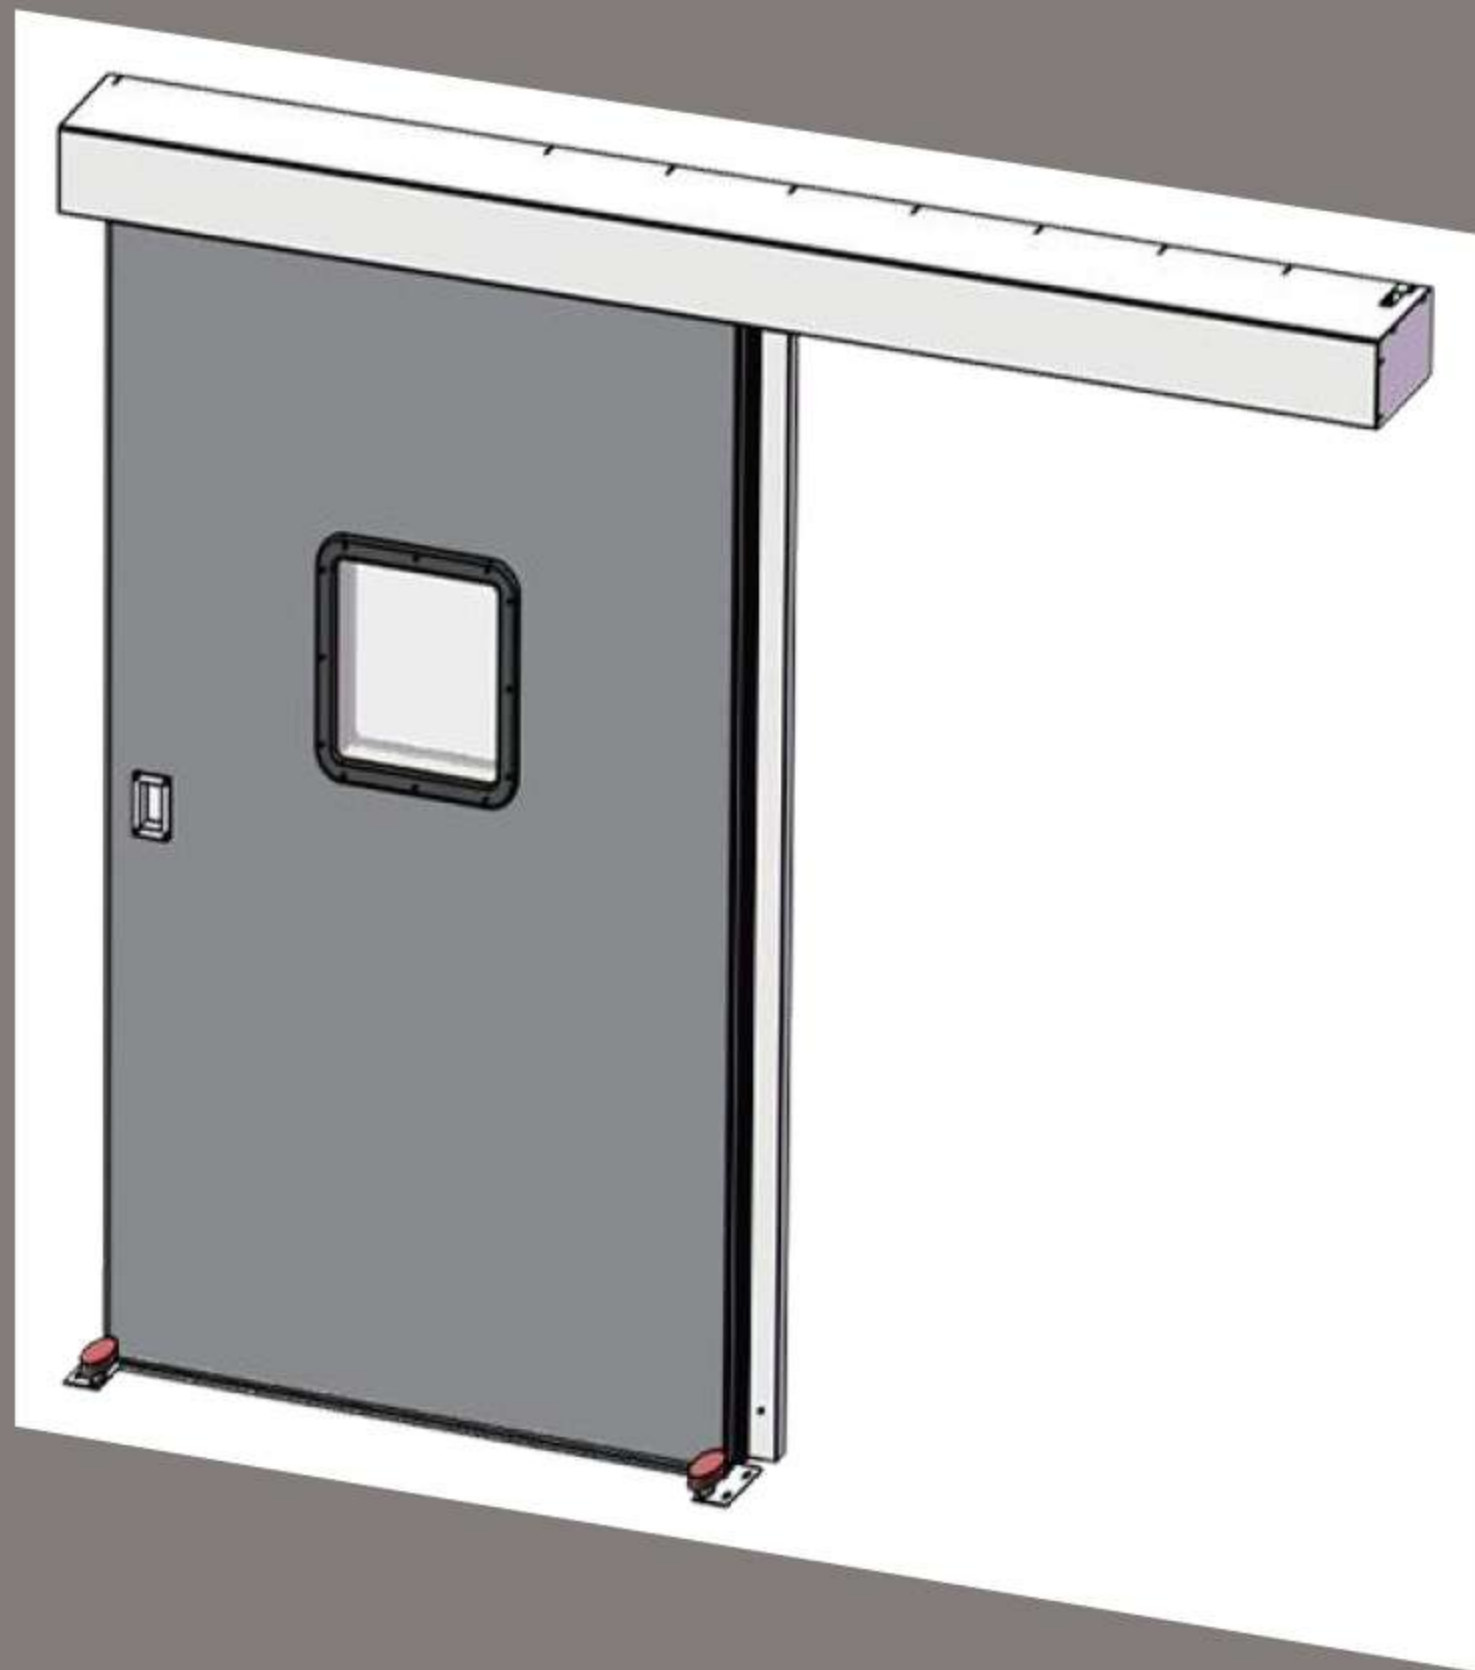


TDK corrosion-resistant doors include two types of sliding doors: SD 500A and SD 500F. Both door panels are 1-3/4" thick, can be either manual or motorized, single sliding or bi-parting. SD 500A has ABS finish. SD 500F has fiberglass finish.

They both have a seamless door panel and can be washed down every day.



Foam Core

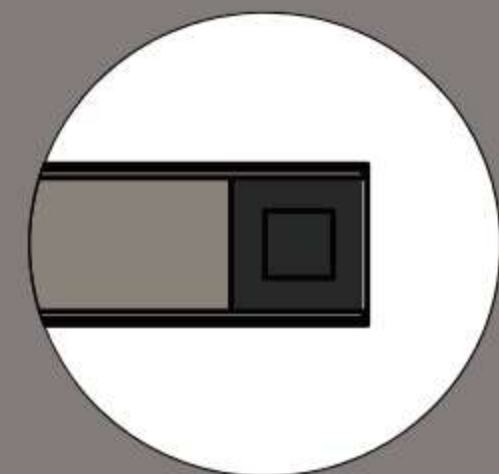

Plastic honey comb core



Royal Blue



Metallic Gray



Black



Cloud Gray



Beige



red

Door Panel

- 1-3/4" Door Panel
- Plastic Honey Comb or Foam Core
- Chemically Bonded ABS/Fiberglass



Options

- Window Size
- Single Pane/Double Panes
- Impact/Kick Plate
- Cart Guards
- Push Plate
- Pull Handle



Applications

- Pharmaceutical
- Cold Storage
- Food Processing
- Industrial
- Chemical plant
- Warehouse

Types of Traffic



- Personnel
- Cart
- Pallet Jack
- Motorized Pallet Jack

Environments




- Temperature - Cooler
- Wash Down
- Corrosion Resistance






Minimum Panel Thickness: 1.34"
1/8" Single Pane




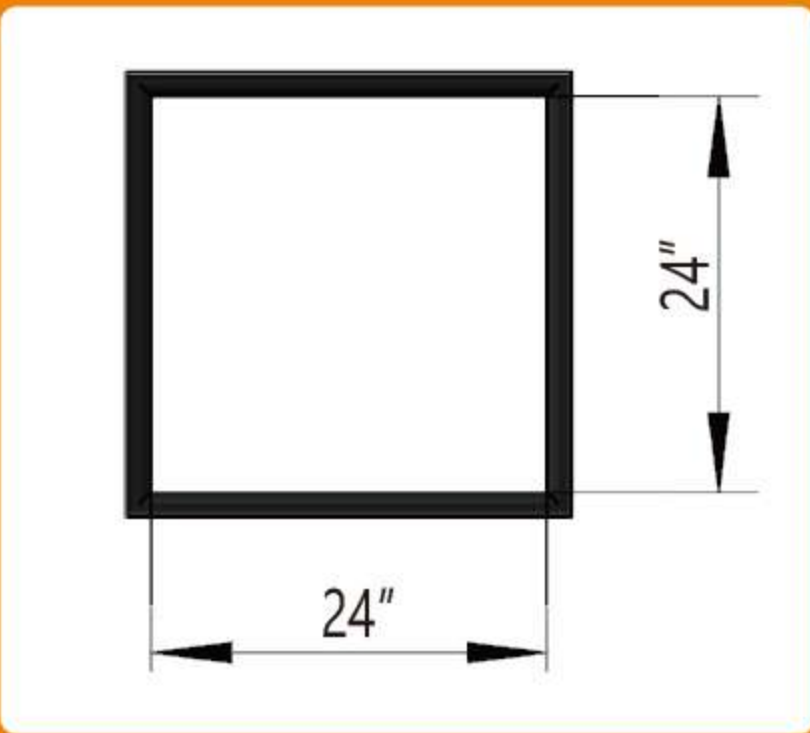
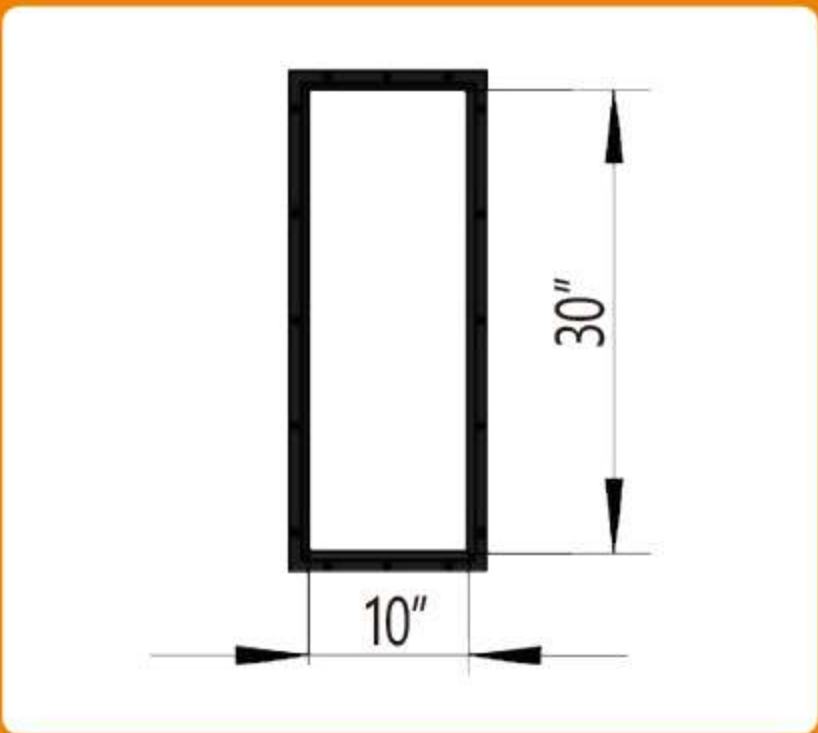


Minimum Panel Thickness: 1.58"
1/8" Single Pane

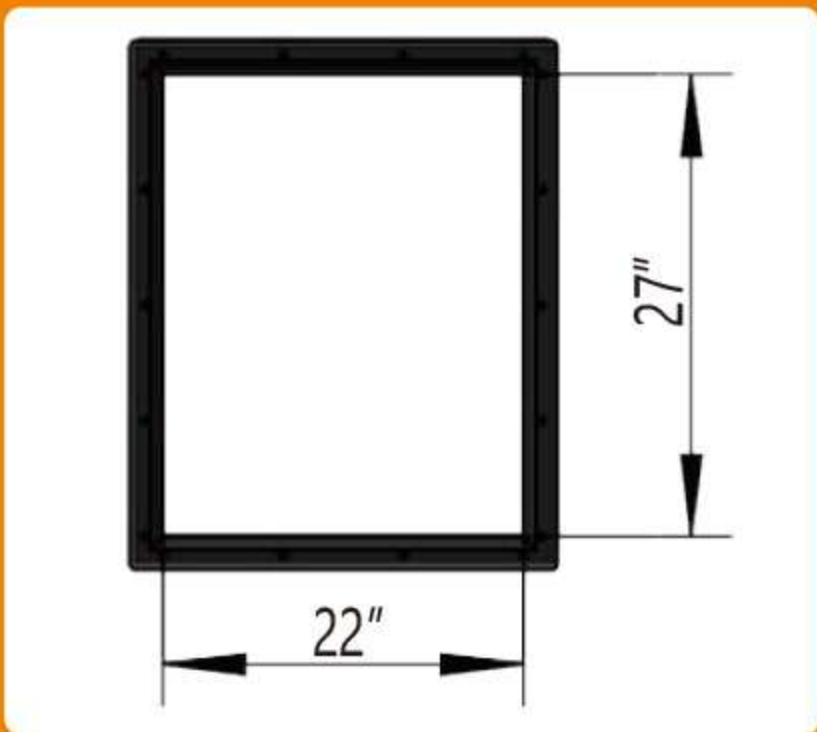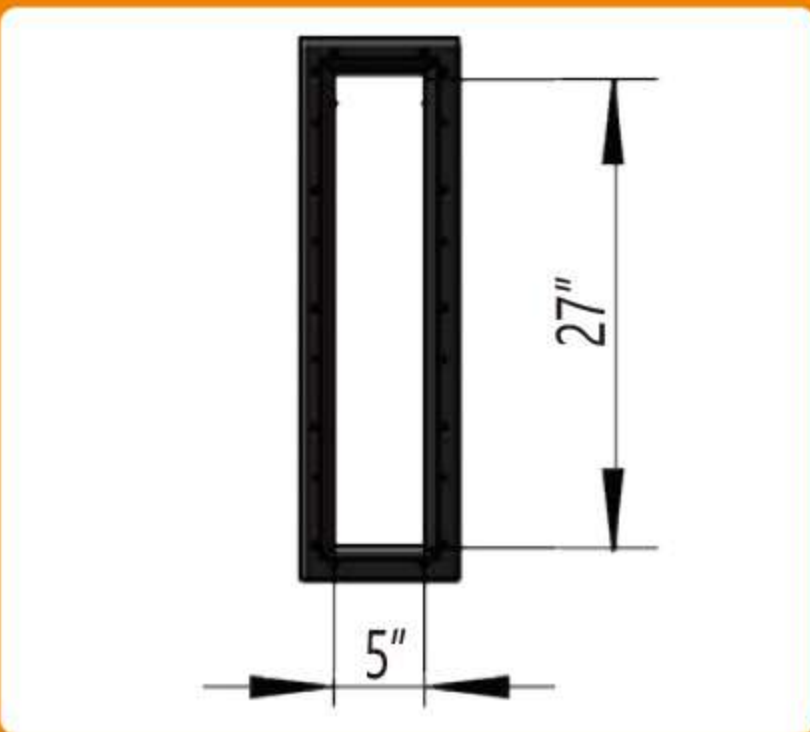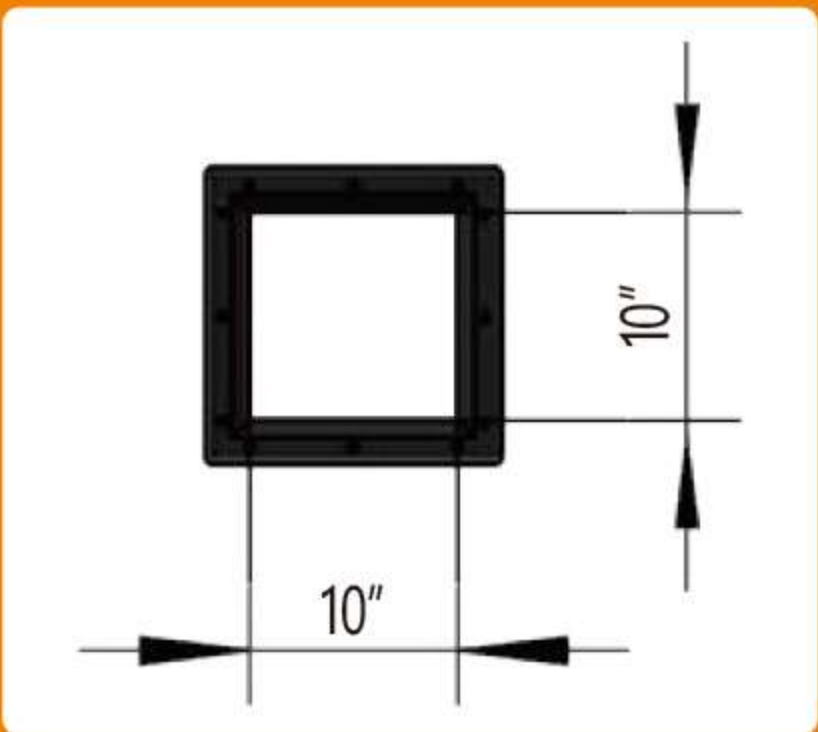

Minimum Panel Thickness: 1"
1/8" Single Pane

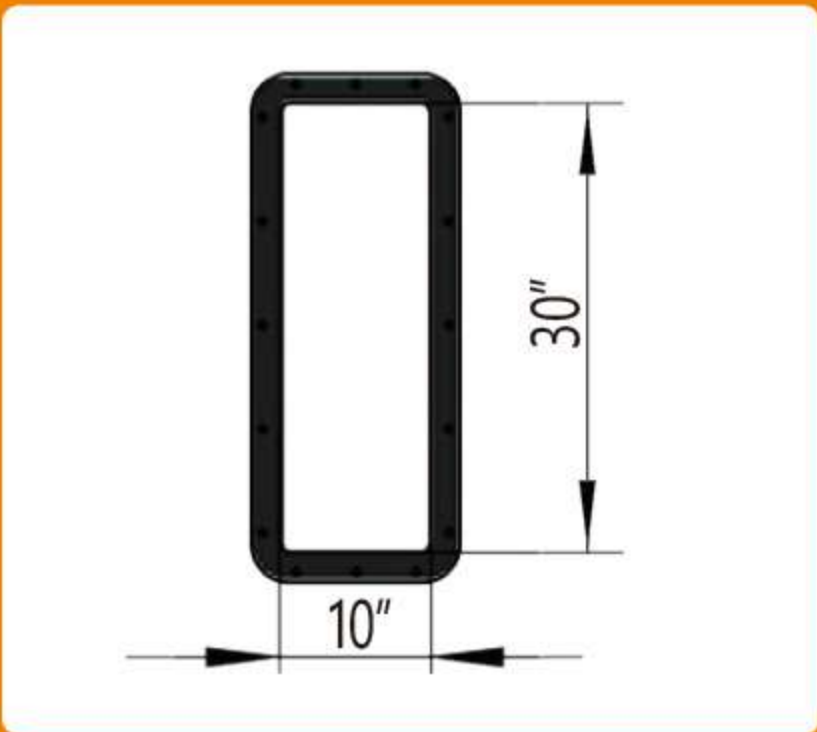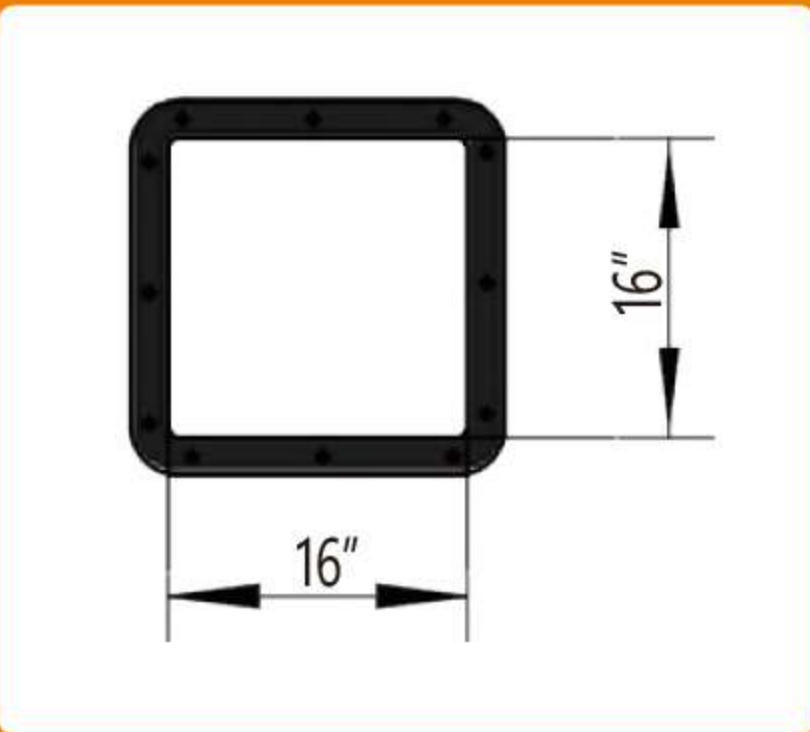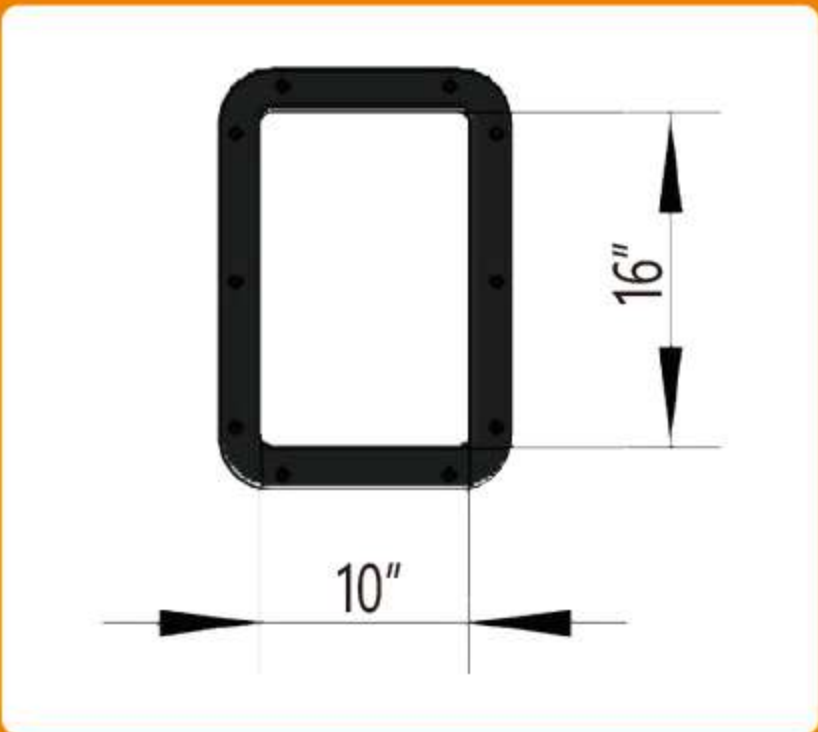

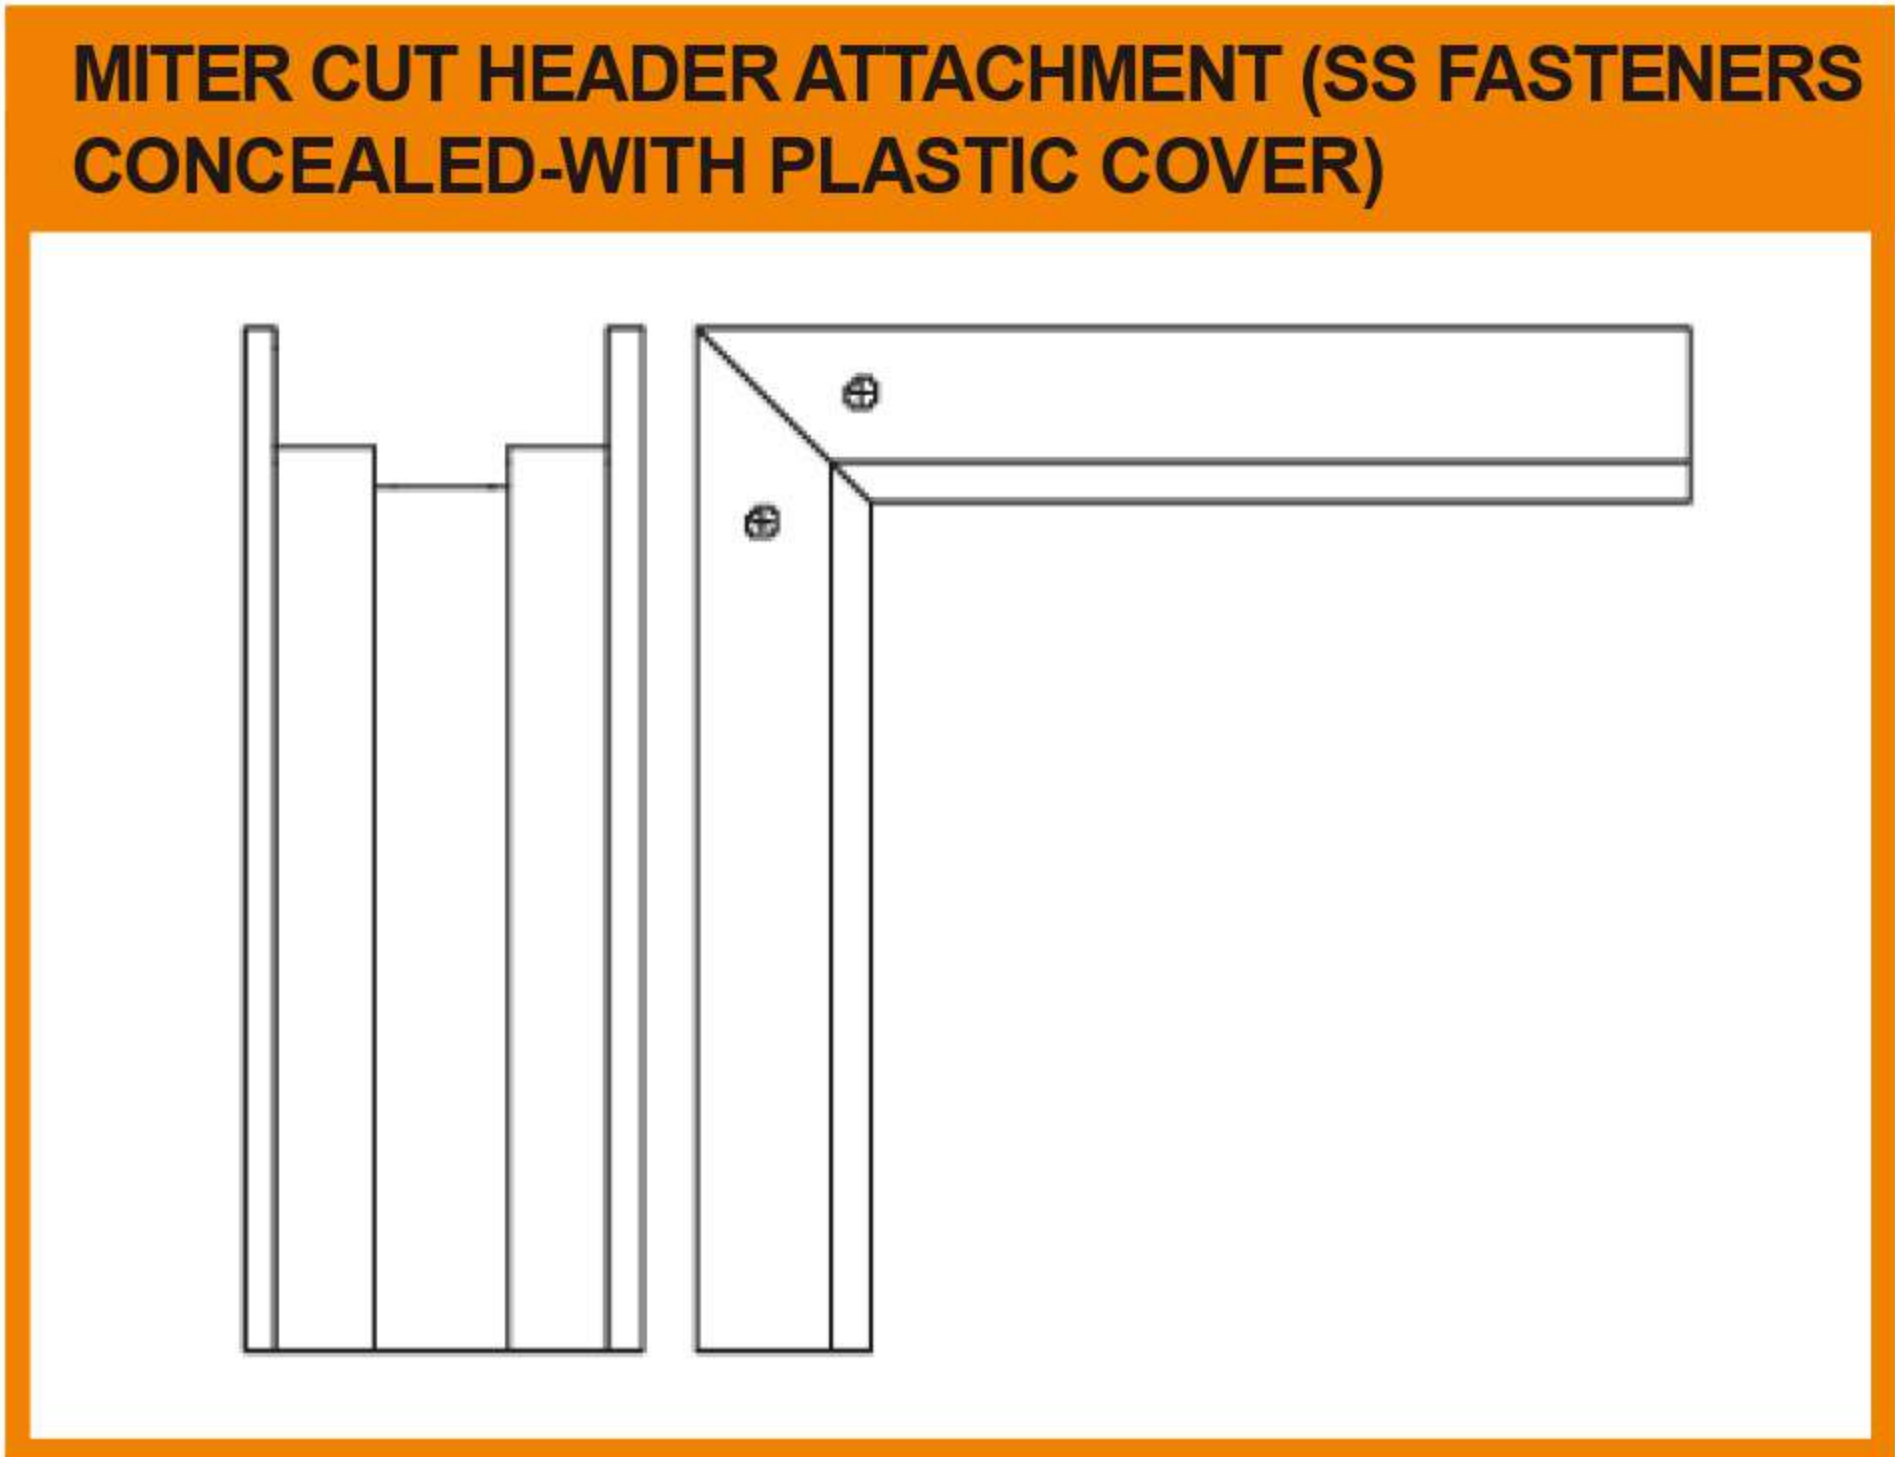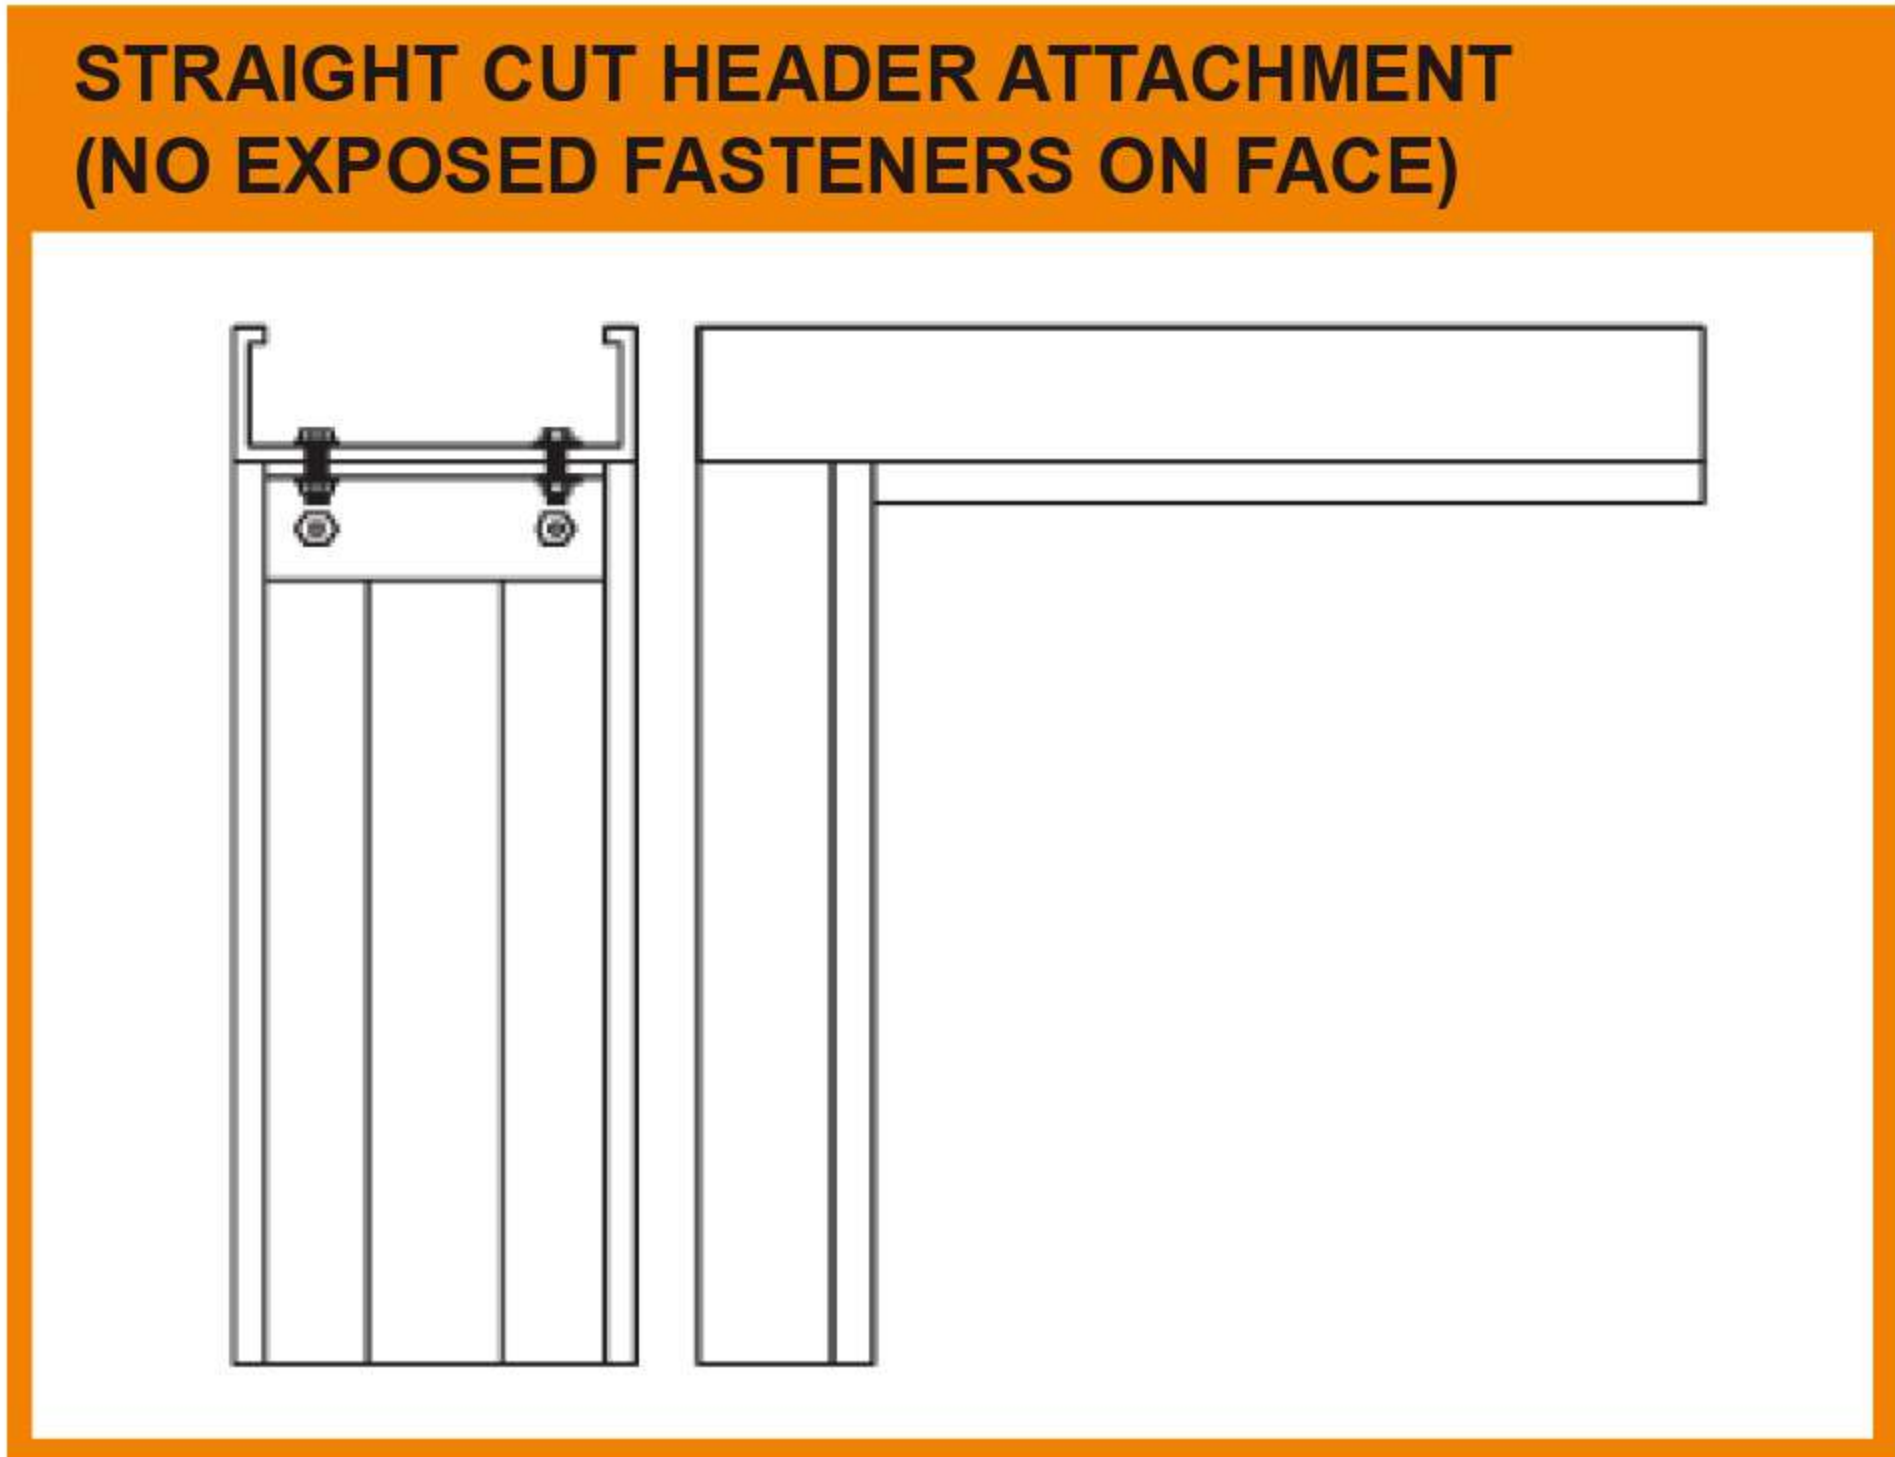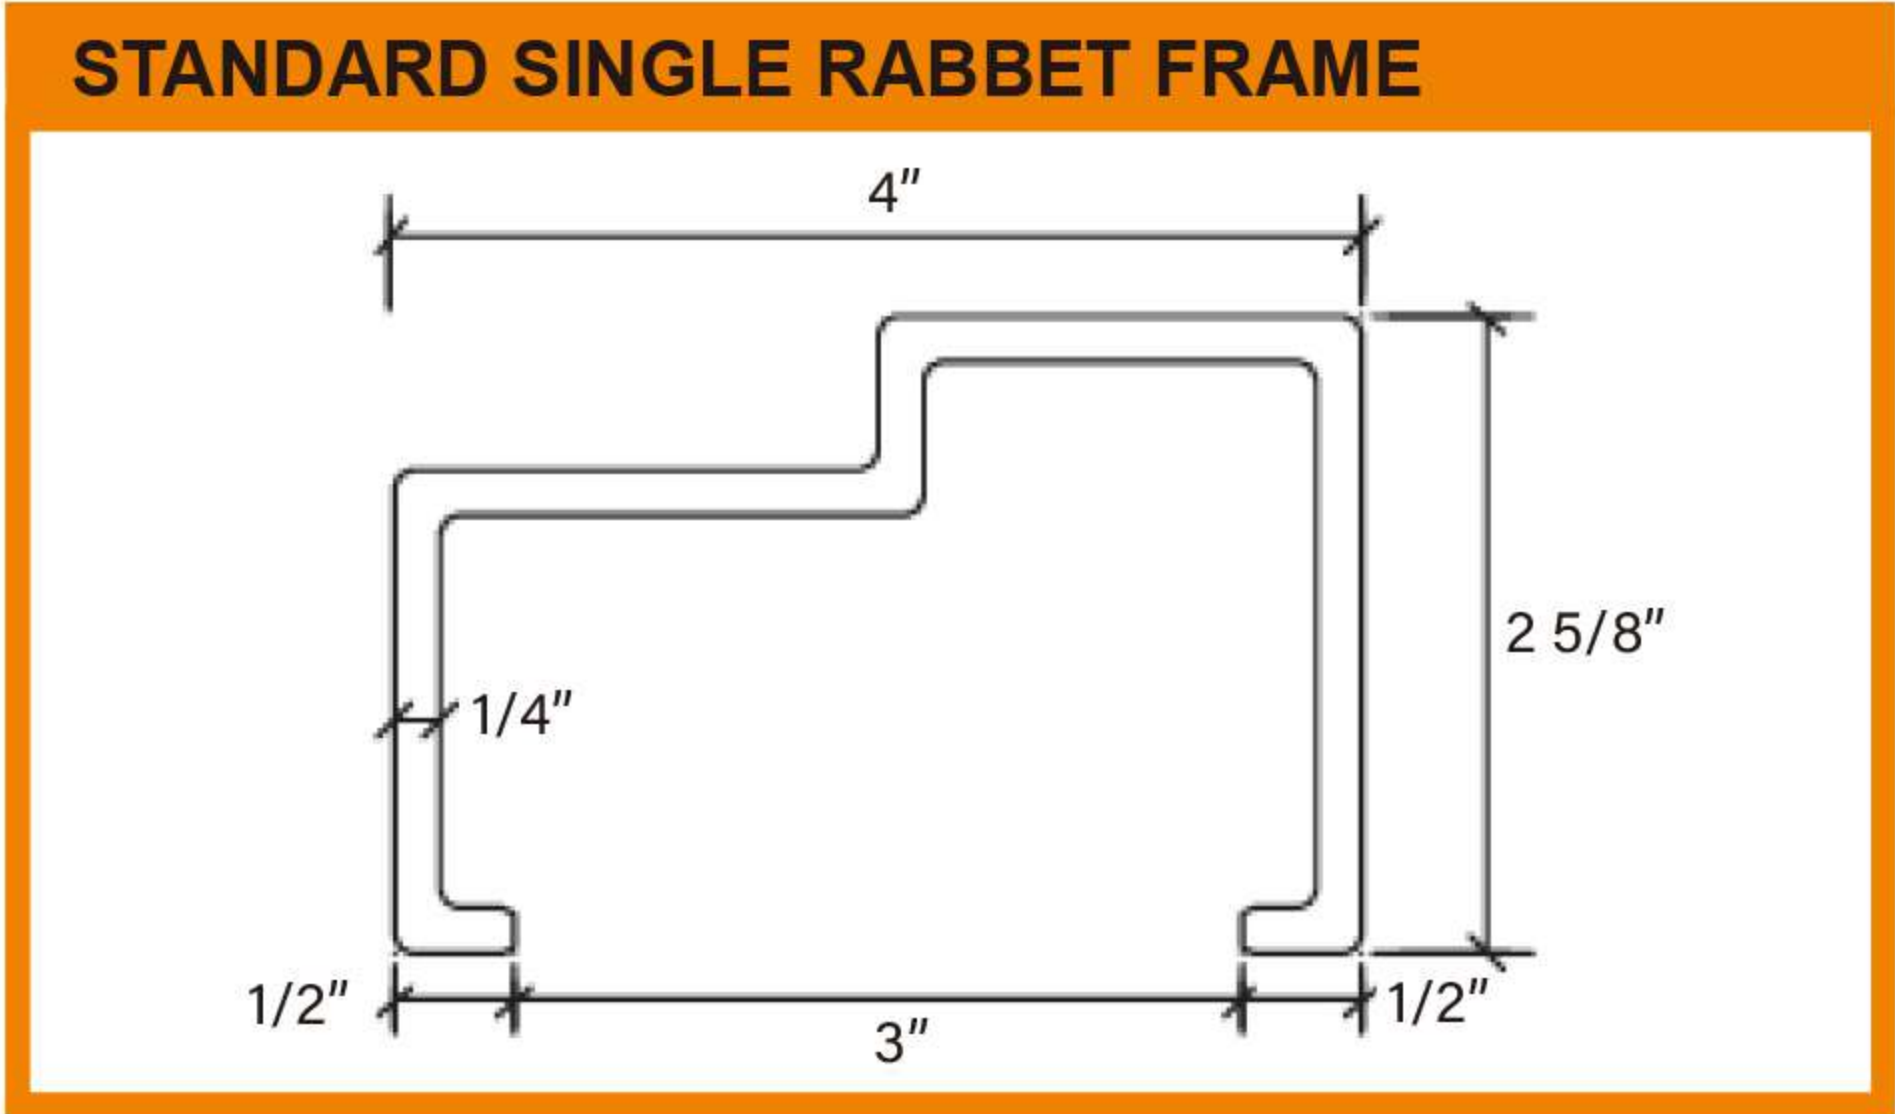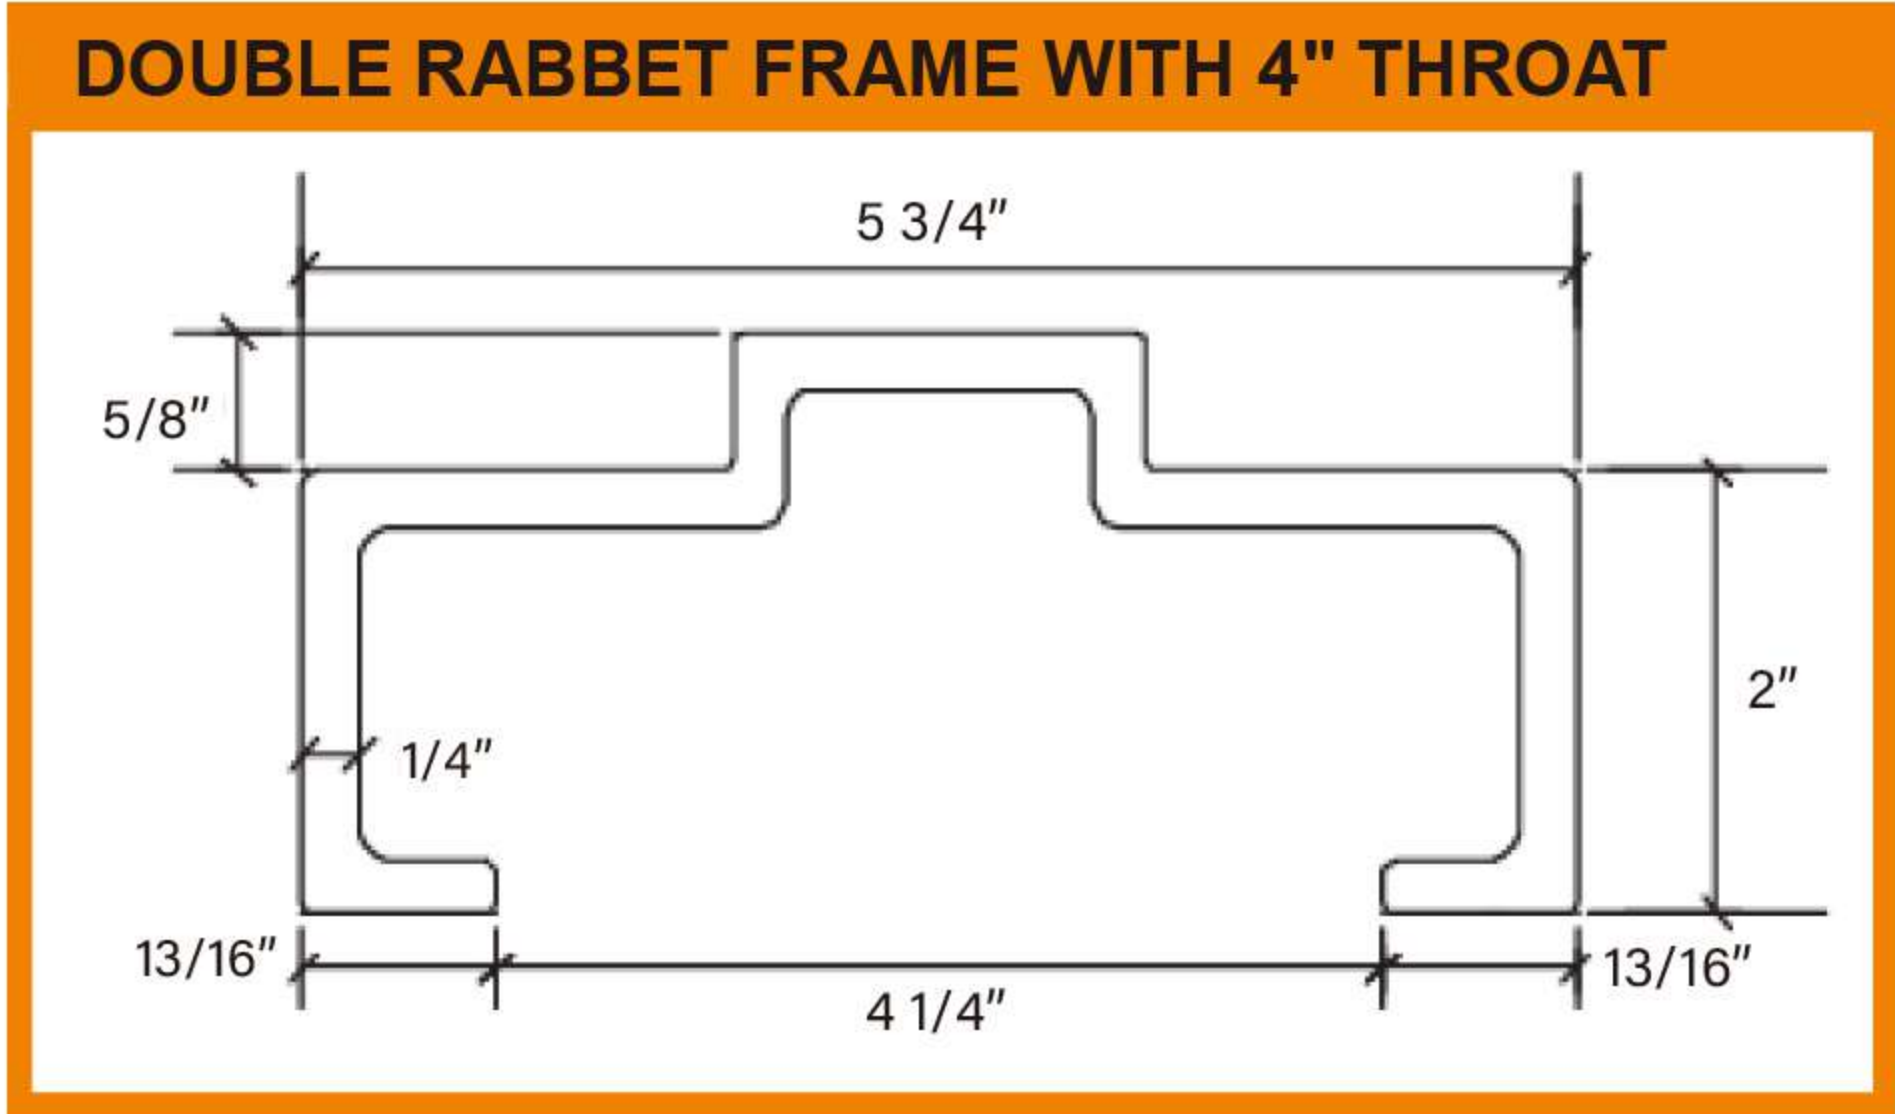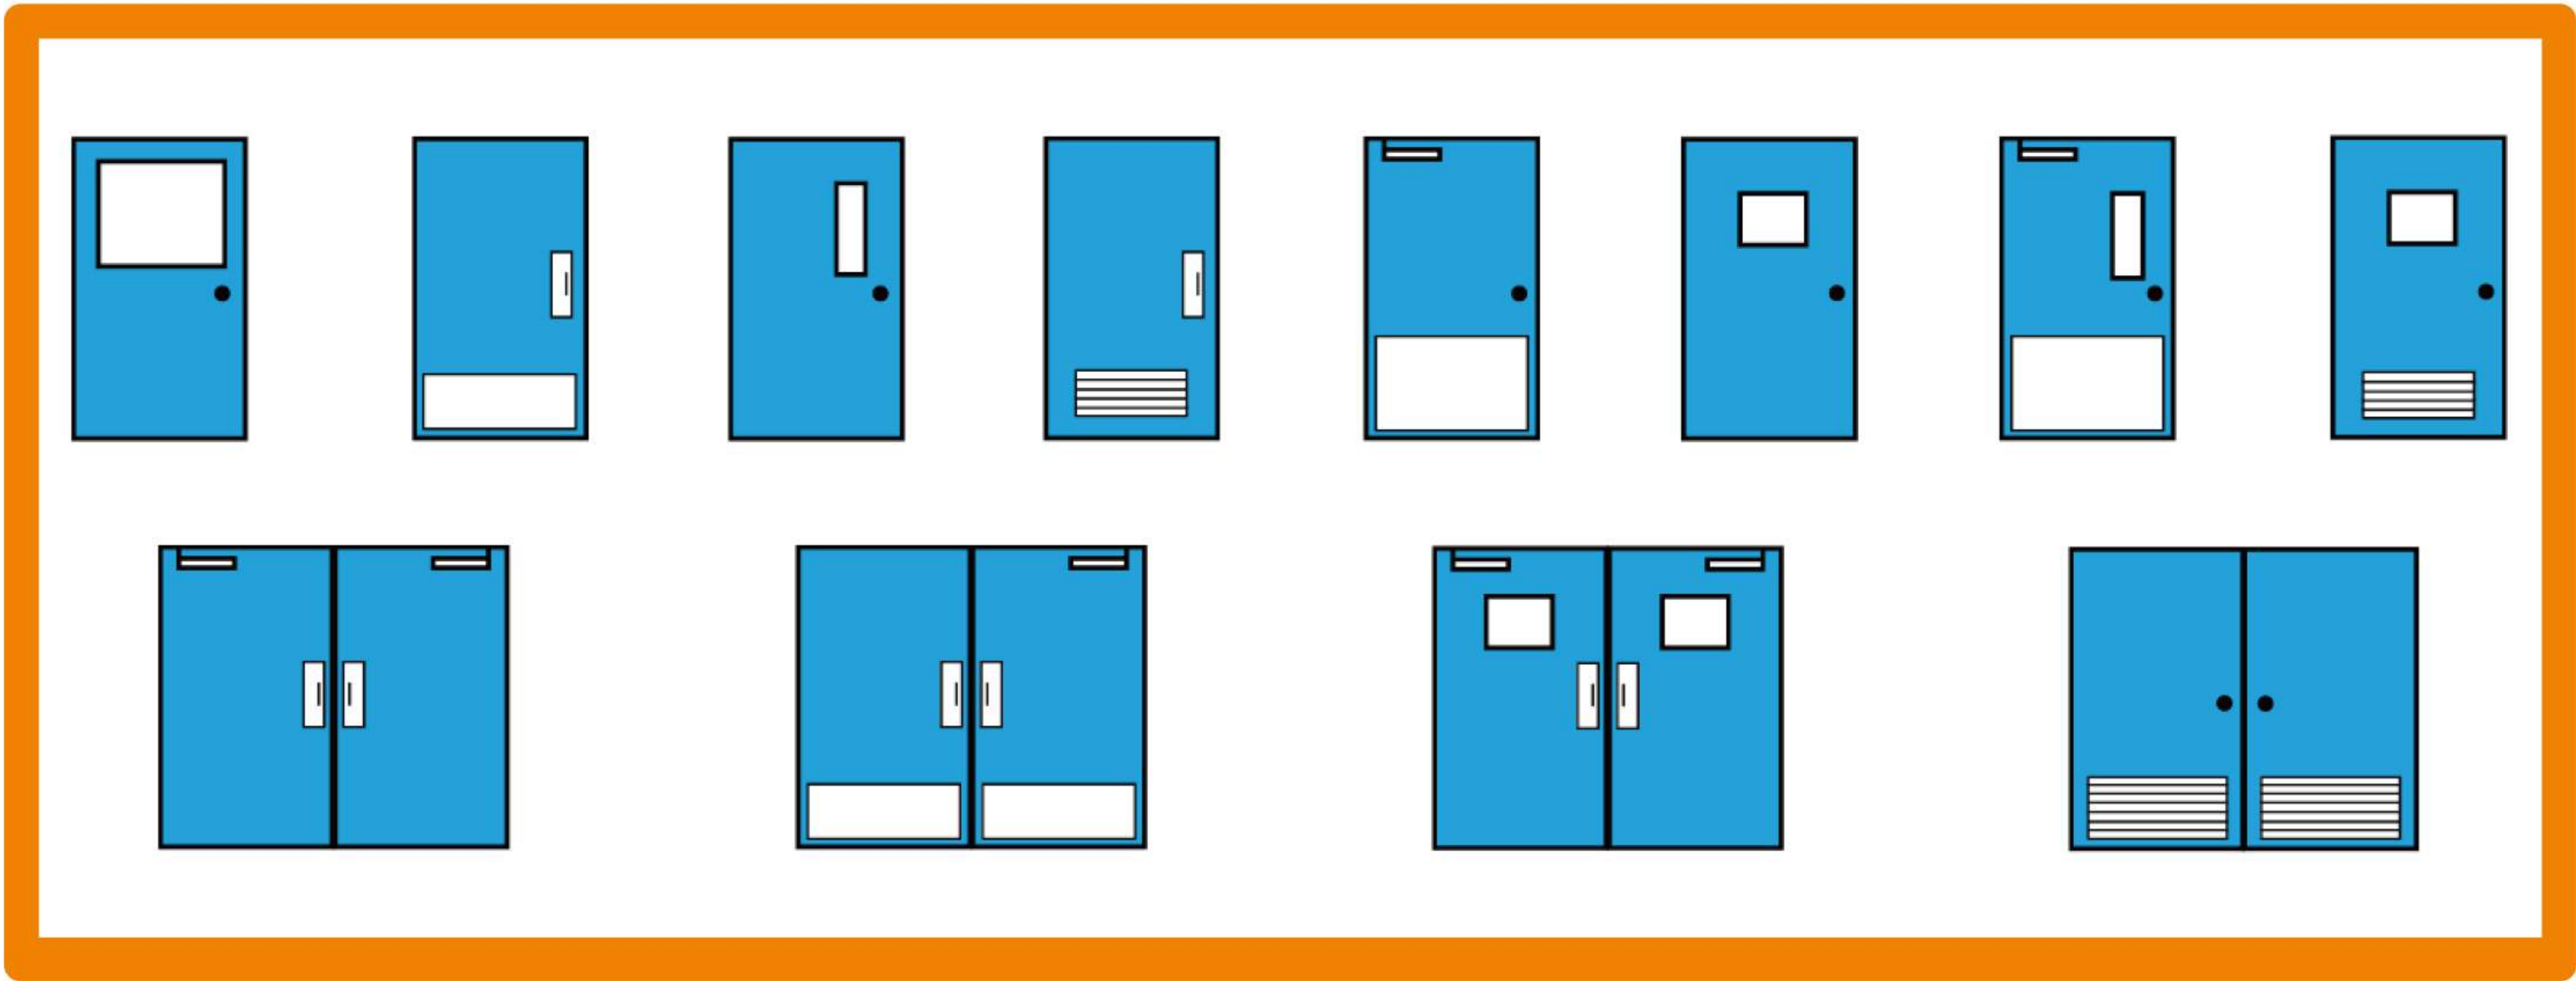

MORE PRODUCTS >>>



Special Traffic Doors



High Speed Doors



Fiberglass Doors



Website: www.tdkdoors.com • Email: info@tdkdoors.com

For downloadable drawings
and specifications please visit
www.tdkdoors.com

In our continuing effort to improve our products, some specifications or descriptions may change. We reserve the right to make such changes without notice or recourse.