



3/8"-16 FLANGE BOLTS
(4 EA.) PROVIDED WITH
FRAME , TO ATTACH HEADER
TO JAMBS

3/8" LAG BOLTS (6 EA.)
PROVIDED , TO ATTACH
UPPER JAMBS TO ROUGH
OPENING

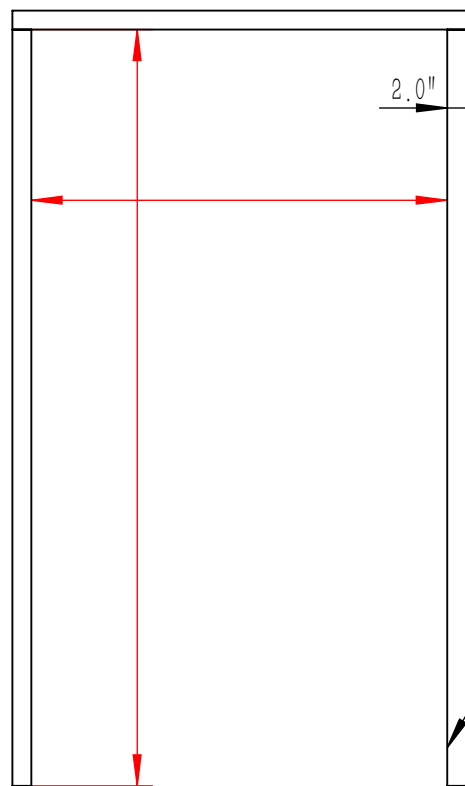

STEEL TUBING,
0.083"x2"x4",
JAMBS AND HEADER,
POWDER COATED

ALL HINGE MOUNTING
LOCATIONS ARE PROVIDED
WITH 1/4"-20 RIVET NUTS, TO
PROVIDE SUPERIOR THREAD
RETENTION AND IMPROVED
STRENGTH

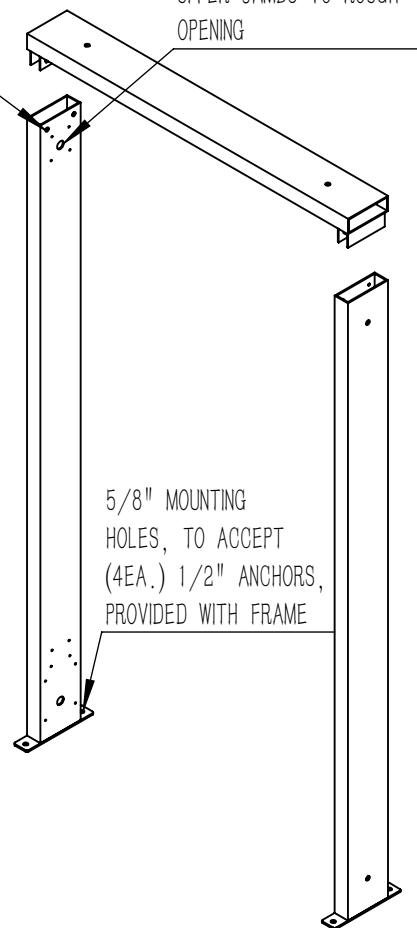

5/8" MOUNTING
HOLES, TO ACCEPT
(4EA.) 1/2" ANCHORS,
PROVIDED WITH FRAME

SPECIFICATIONS:

FINISHED OPENING WIDTH:

FINISHED OPENING HEIGHT:

ROUGH OPENING WIDTH:

(FO WIDTH+4-1/4")

ROUGH OPENING HEIGHT:

(FO HEIGHT+2-3/16")

2X4 2X6

POWDER COATED

WHITE

GRAY

BLACK

OPTION

STAINLESS STEEL TUBE KD FRAME

QTY

QUOTE: ORDER: NUMBER:

CUSTOMER:

JOB:

DATE:

OTHER NOTES:

SIGNATURE:

SHIP TO: